

STRONGBRIDGE

Hydraulic Re-Round Tool General Instructions




Step 1)

Secure clamp to pipe.




Step 2)

Secure hydraulic piston with included pin. Attach hoses to the piston.

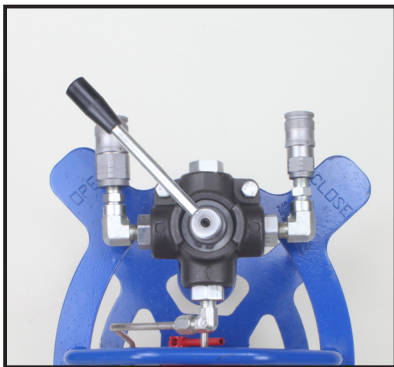

Step 3)

On the pump kit ensure the handle is in the "open" position before connecting the hoses.

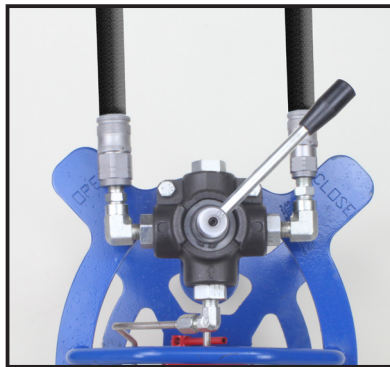

Step 4)

Attach hoses and change the position of the handle from "open" to "close".



Step 5)

Pump to correct ovality. To release the clamp, change the handle to the "open" position and pump.

Strongbridge International LLC | Jacksonville, FL

T: 904-278-7499 | F: 904-278-7501 | E: sales@strongbridge.us | W: www.strongbridge.us